

YOUR ADDRESS HERE

DIMENSIONS Max 6500 (w) x 2600mm (h)	
Width (mm) _____	Height (mm) including cill if required _____

CONFIGURATION (When viewed from outside) *Drainage tray recommended

SLIDING DOOR	
INNER Recommended	☐
OUT*	☐

THRESHOLD	DRAINAGE TRAY	
	*Recommended	*Y N
LOW THRESHOLD WITH RAMP <i>Not available on triple track</i>	N/A	☐
STANDARD FRAME	☐	☐
STANDARD FRAME WITH NOSE	☐	☐
SLIM INTERLOCK OPTIONS		
STANDARD 80MM	☐	☐
SLIM 52MM <i>*Not available on 3 Pane option</i>	☐	☐

SASH STYLE	
CONTEMPORARY	☐
STEPPED	☐
MAIN HANDLE FINISH	

HANDLE OPTIONS:
White, Black, Silver

GLAZING	
28MM DG 1.4 U-value	☐
40MM TG 1.1 U-value	☐
44MM TG 1.0 U-value <i>Contemporary only</i>	☐
LAMINATED	☐
UNGLAZED (Still tick which glazing units you will use)	☐

Figures are whole door U-values based on Part L standard configurations

SASH & FRAME COLOUR	EXT	INT
HIPCA GLOSS WHITE 9910 GLOSS	☐	☐
PURE WHITE 9010 MATT	☐	☐
JET BLACK 9005 MATT	☐	☐
CREAM 9001 MATT	☐	☐
AGATE GREY 7038 MATT	☐	☐
PASTEL TURQUOISE 6034 MATT	☐	☐
SQUIRREL GREY 7000 MATT	☐	☐
CHOCOLATE BROWN 8017 MATT	☐	☐
ANTHRACITE GREY 7016 MATT	☐	☐
MID BRONZE METALLIC EFFECT	☐	☐
BLACK METALLIC EFFECT	☐	☐
SILVER METALLIC EFFECT	☐	☐
BESPOKE SUBJECT TO MINIMUM ORDER QTY. PRICE ON APPLICATION	EXT RAL: _____	INT RAL: _____

DOOR HARDWARE			
HANDLE INTERNAL WITH FINGER GRIP EXTERNAL Standard with 50/10 cylinder	☐	☐	☐
HANDLE INTERNAL AND EXTERNAL with 50/50 cylinder	☐	☐	☐
FRAME EXTENSIONS (When viewed from outside)			
25MM	TOP	L	R
☐	☐	☐	☐
OPTIONS			
TRICKLE VENTS 25mm frame extension required. 2 x vents split equally as standard	☐	☐	☐
HEAD DRIP	☐	☐	☐
UPGRADES			
(Both can be fitted and are recommended for extra large door sashes over 200kg / ~300kg)			
DROP ASSIST ¹	☐	☐	☐
LIFT ASSIST ²	☐	☐	☐

TO ORDER OR REQUEST A QUOTE FOR A PRESTIGE LIFT & SLIDE PATIO PLEASE FILL IN THIS FORM AND EMAIL BACK TO

EMAIL ADDRESS HERE

QUOTE ☐ ORDER ☐

JOB DETAILS

NAME _____

REFERENCE _____

CONTACT NUMBER _____

EMAIL _____

ADDRESS _____

SITE POSTCODE _____

PREFERRED DELIVERY DATE
_____/_____/____/

NOTES

YOUR DETAILS

NAME _____

COMPANY _____

CONTACT NUMBER _____

EMAIL _____

ADDRESS _____

POSTCODE _____

SIGNATURE _____




1. Low Threshold with Ramp
(25mm high) tested to the requirements of Part M
*Only available in double track

2. Standard Outer Frame
(38mm high inside)
*Allow an additional 12mm if using optional drainage tray


3. Standard Outer Frame with Clip-on Cill Nose
(38mm high)
*Allow an additional 12mm if using optional drainage tray

Threshold Options


1. Low Threshold with Ramp

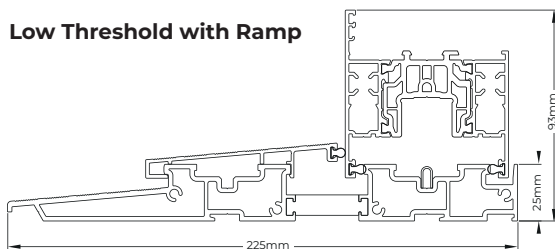


2. Standard Outer Frame

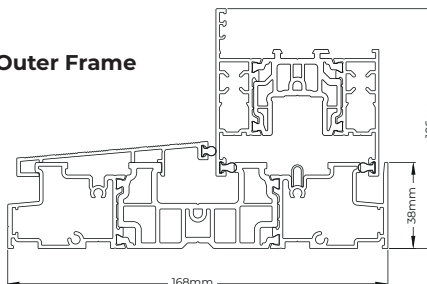

3. Standard Outer Frame with Clip-on Cill Nose and Drainage Tray

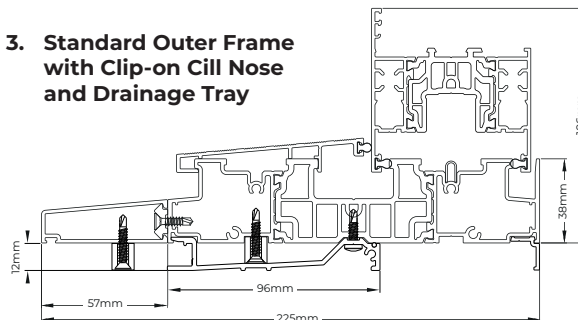


4. Standard 3-Pane Outer Frame with Drainage Tray

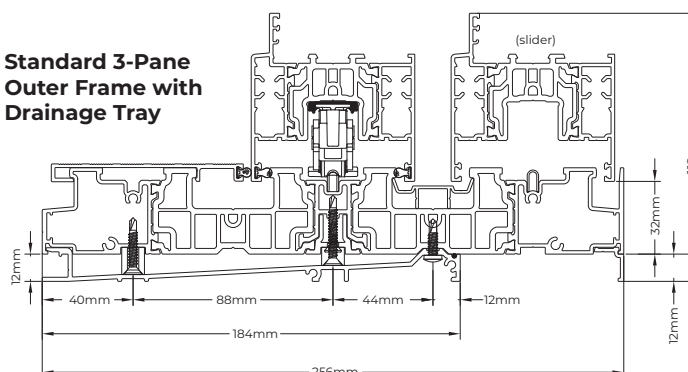

Prestige
LIFT & SLIDE PATIO DOOR

At a glance

- Double and Triple Track Options
- Max 6.5 x 2.5m
- Max 400kg Sash
- Slim 106mm Frame to Sash Sightline
- Standard 80mm Interlock Sightline
- Ultra Slim 52mm Interlock Option
Suitable for most twin track doors
- Up to 44mm Triple Glazing
36mm on stepped sashes

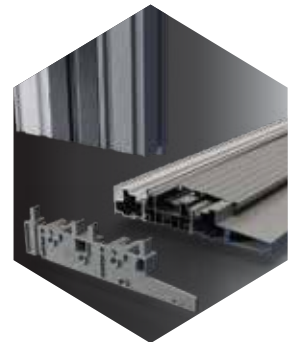

Square cut frames for easy assembly on site if required



Concealed buffers help dampen sash operation



Flush jambs prevent snagging and keep visual lines clean